

Screw Installation

- One person installation
- Installs over wood/metal studs, drywall, concrete block etc
- Waterproof - insect - rotproof
- Ideal for high abuse applications (i.e. garage, carports, pools, storage sheds, basements)
- Cleans quickly and easily.

before you begin, remember to always work safely, follow tool manufacturers safety instructions and wear safety glasses


Quick tips

- Use #6 bugle-head screws*
- No need to pre-drill or counter-sink
- If installing over drywall use 1-5/8" (or longer) #6 bugle-head screws
- Cuts cleanly and easily with standard woodworking tools


Quick tricks

- Join panel ends over studs to maximize load capacity
- use a running bond (brick layer) pattern to minimize seams
- Optional color matched screws available - optional color matched trim available (panel edge trim)
- Minor surface scratches or blemishes can be removed with a paper towel dampened with Acetone (read and follow label directions)

* for maximum load capacity, screw through every slot into every stud



FRONT
Make certain to install panels right side up




TOP

as seen on:



www.storewall.com
copyright storewall, 2020
US Patent Protected

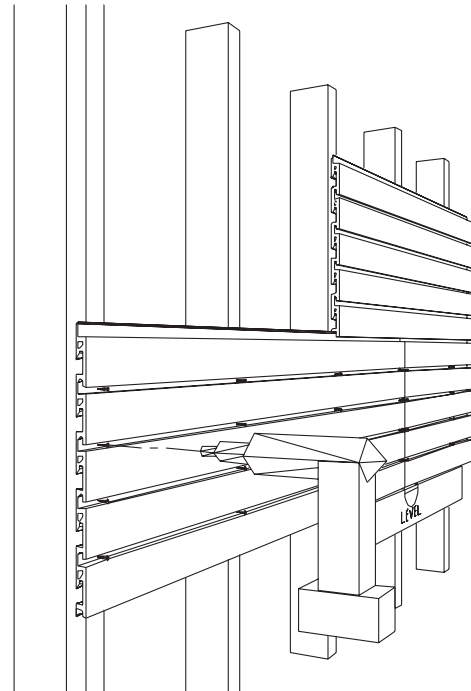


1 - Draw a line at lowest point you want storeWALL

2 - Place the first panel on this line and screw in place (make certain storeWALL is level and plumb)

3 - Place second panel NEXT to the first panel and screw panel in place

4 - Continue adding panels until the first row is complete

5 - Begin second row panels on top of first row and screw panels in place

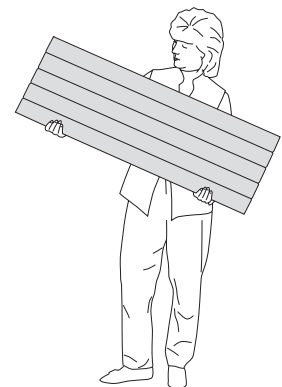

Basic Duty Screw Installation


Step 1: Make a level line at the top or bottom of desired location. (Use a laser, level or string for accuracy)



Step 2: Secure the first panel by driving the screws through the slots of the panel's front face, directly into the center of the wall studs or blocking.

Use storeWALL's color matching screws for best match to our wall panels.

No pre-drilling or countersinking is necessary. The screw head will flush up with the slot surface

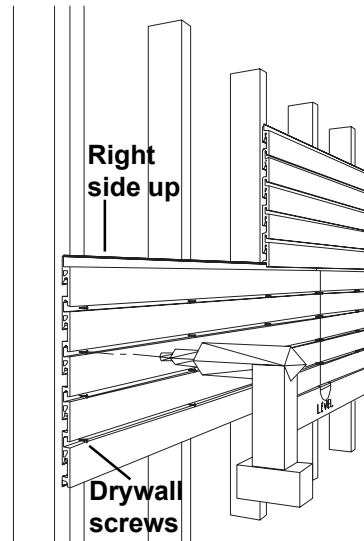

CUTTING

- storeWALL panels cut easily using any traditional wood working tools.
- The cleanest cuts are achieved with a 32 tooth, or larger, carbide blade (triple cut) or blades used to cut MDF (Medium Density Fiber board) & Laminates.
- Treat storeWALL like any prefinished material:
 - Cut "good side up" on a table saw
 - Cut "good side down" with skill saw / radial arm saw / sabre saw



For more information
please contact us:

(866) 889-2502 (toll free, continental US)
(414) 434-1620 (direct, Hawaii and Alaska)

Outside the US: +1 414-434-1620

By Email: Sales@storeWALL.com

www.storeWALL.com